



- No use of sealant to fix the prisms in the dome thanks to customized gaskets, making their replacement quick and easy
- No optical adjustment after LED module or prism replacement
- Valve for watertightness test after overhaul
- Operating with any topology of CCRs designed in compliance with IEC or FAA requirements

** For monitored fixtures, isolation transformer max size: 200VA*

▶ PERFORMANCES

- The electronic is strong-built and highly resistant to shock and vibration
- Automatic adaptation to the frequency of the supply current
- A surge protection device is provided in the electronics as required by the FAA "Engineering Briefing No.67"
- Immediate detection of an internal fault
- 6.35 mm protrusion strongly reduces vibrations to aircrafts and to light itself, increasing its lifetime
- Dome smooth outer profile makes the light less sensitive to snowplough blades
- Unidirectional, 12" dia.
- Drop-forged dome and cast aluminium lower cover make the fitting sturdy, but lightweight too for ease handling in the field
- Light output practically not affected by heavy rainfall thanks to the shallow channel in front of the prism windows
- O-Ring placed outside the dome to avoid dirt deposits between light and base
- Protection degree: IP68
- Temperature range: -45°C to +55°C

▶ COMPLIANCES

CAO	Annex 14 - Volume I Fig. A2-1 and A2-2
EASA	CS-ADR-DSN Fig. U-5, U-6
IEC	TS 61827
NATO	STANAG 3316
CAA	CAP 168
IAAE	TP312

▶ APPLICATIONS

Approach (centreline and crossbars) and Approach Side Row
Barrettes for ICAO CAT I, II and III, and military runways

▶ BENEFITS

- 60000 hours LED rated life at full intensity, but over 100000 hours in field operating conditions
- In new installation, LED lights mean lower loads, lower size of CCRs and transformers, thus low life cycle costs
- The light output is variable like a traditional halogen lamp, as indicated by the FAA "Engineering Briefing No.67"
- Colour emitted directly by LEDs : absence of coloured filters ensures no energy losses and no colour shifts
- Fully compatible with existing AFL infrastructure*
- Designed with simplicity allowing longer maintenance intervals and fewer spare parts

▶ INSTALLATION

- Suitable for 12" dia. bases
- Specific tools available for easy and precise installation

MAIN COMPONENTS OF THE LIGHT UNIT

- 1 : Dome (Upper Cover)
- 2 : O-Ring for dome (internal)
- 3 : O-Ring for lower cover
- 4 : Prism Gasket
- 5 : Prism
- 6 : Prism holder gasket
- 7 : Mounting plate
- 8 : LED module with accessories
- 9 : Optical Lens
- 10 : Heat Sink
- 11 : Bracket
- 12 : Lower cover with electronic
- 13 : Valve for watertightness test
- 14 : Plug

**Refer to the relevant technical manual for the complete list of the available spare parts*



PHOMETRIC PERFORMANCE

Fig. 1 ICAO A1-2 - White


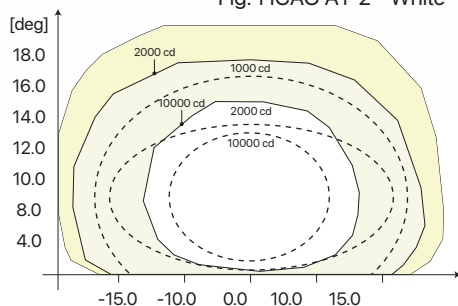


Fig. 2 ICAO A2-2 - Red

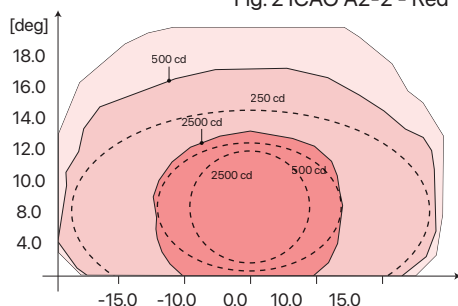

POWER CONSUMPTION

Electrical System	1 Plug
Approach White (w/o Arctic Kit)	73 VA
Approach White (with Kit Artico)	113 VA
Approach Red (w/o Arctic Kit)	61 VA
Approach Red (with Kit Artico)	101 VA


** Measured at 6.6 A and referred to the highest consumption configuration*

POWER FACTOR


Input Step	2.8A	6.6A
Power Factor	0.96	0.98

SHIPPING WEIGHTS & VOLUMES


	Light Unit	Shallow Base
Weight(kg)	8.5	7.3
Volume(m ³)	0.022	0.022



Light Fixture 12" dia.



Shallow Base 12" dia.

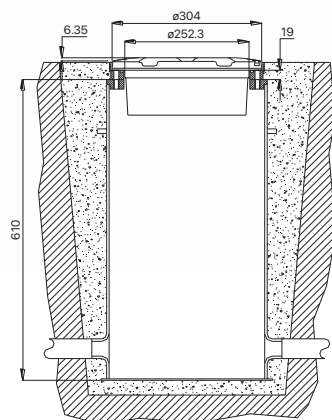

L-868 Deep Base 12" dia.

LIRA - W - L - M


Basic P/N

COLOR
W (White) - R (Red)

Monitoring
O (Without Monitoring)
M (With Monitoring)

Toe-in*
R (Left) - L (Right) - S (Straight)

* The beam aiming is not field adjustable

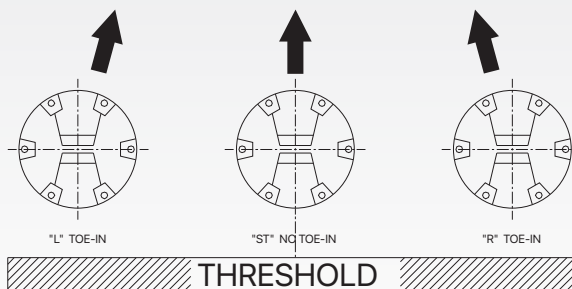

تهران، بزرگراه شیخ فضل ا... نوری، خیابان سازمان آب، خیابان حاجی پور امیر، کوچه مهدی، پلاک ۱
No.1, Mahdi Alley, Haji Pour Amir St., Sazman Aab Ave., Sheikh Fazlollah Nouri Highway, Tehran, IRAN

Email	info@tmb-co.com	فکس	۰۲۱ ۸۸۳۶ ۰۷۰۷	تلفن	۰۲۱ ۸۷۷۴۰	کدپستی	۱۴۵۴۶۴۳۶۸۵
Web	www.tmb-co.com	Fax	98 21 8826 0707	Tel	98 21 87740	P.O Box	1454643685

